

Blending Bricks and Pavers

INFORMATION SHEET

2


As a result of the curing and or kiln firing of raw materials, some variation will occur in the production of our clay and masonry products, which adds to their natural appeal.

To ensure that the overall unique appearance of brickwork or paving is maintained it is recommended that the product be blended during installation.

The following simple steps will ensure that the product is suitably blended and that the final appearance of the brickwork or paving takes advantage of any variation possible in our products.

- 1 Place the product packs as close as practicable to the working area.
- 2 Work from a number of packs simultaneously.
- 3 Take the product down and across a number of packs during installation.

Refer to Midland Brick information sheet for the **Safe Movement and Storage of Bricks and Pavers**.

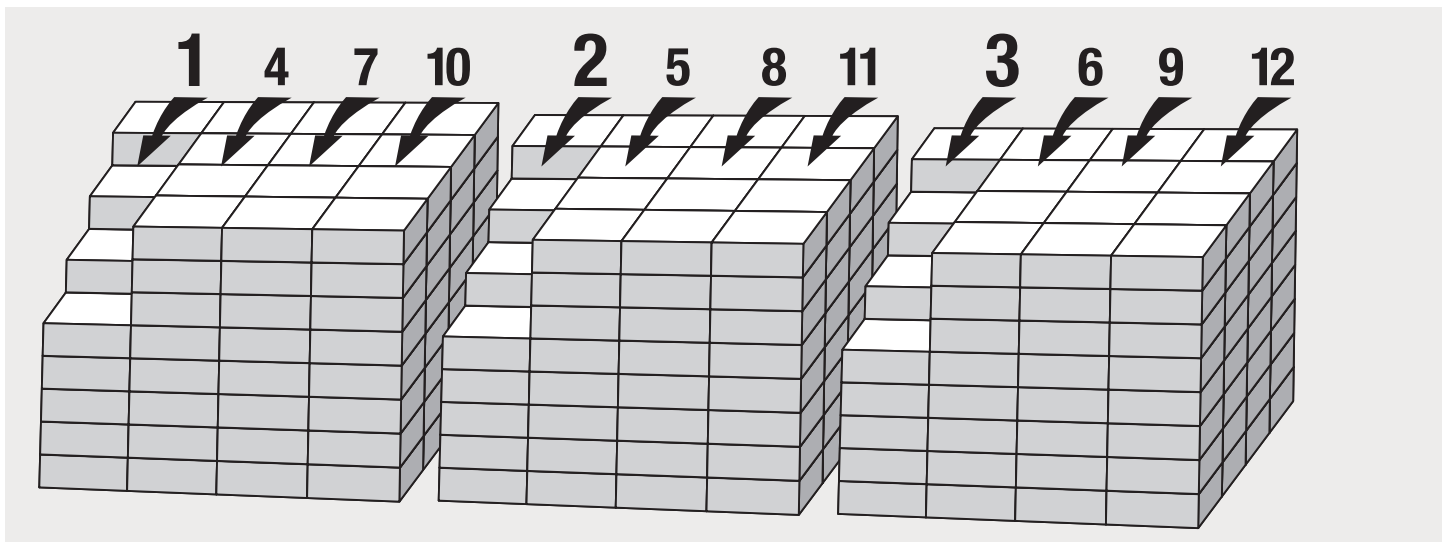

For more information about Midland Brick

Call us on 13 15 40

Visit our website at www.midlandbrick.com.au



Whilst every effort has been made to ensure the accuracy of this information, neither Midland Brick nor its servants or agents, accept any responsibility whatsoever for the information herein contained, which is provided solely at the risk of the receiver. Midland Brick shall not be liable for loss or damage arising or resulting from any cause whatsoever.



Midland Brick, Promenade, Stylestone, Gardenwall are trade marks or registered trade marks of Capitary No.3 Pty Ltd in Australia, other countries, or both. If these and other Midland Brick trade marked terms are marked on their first occurrence in this information with a trade mark symbol (® or ™), these symbols indicate Australian registered or common law trade marks owned by Capitary No.3 Pty Ltd at the time this information was published. Such trade marks may also be registered or common law trade marks in other countries. Other product, company or service names may be trade marks or service marks of others.