

Blending Bricks and Pavers


As a result of the curing and or kiln firing of raw materials, some variation will occur in the production of our clay and masonry products, which adds to their natural appeal.

To ensure that the overall unique appearance of brickwork or paving is maintained it is recommended that the product be blended during installation.

The following simple steps will ensure that the product is suitably blended and that the final appearance of the brickwork or paving takes advantage of any variation possible in our products.

1. Place the product packs as close as practicable to the working area.
2. Work from a number of packs simultaneously.
3. Take the product down and across a number of packs during installation.

Refer to Midland Brick information sheet for the **Safe Movement and Storage of Bricks and Pavers.**

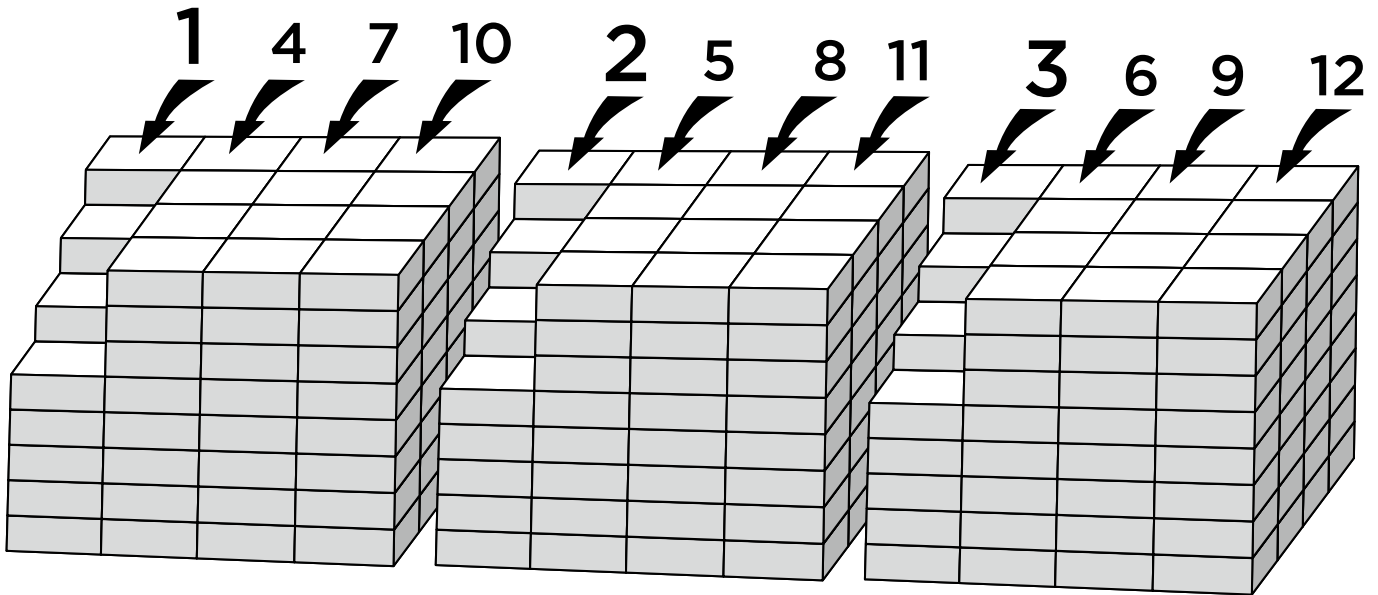

For more information about Midland Brick

Call us on **13 15 40** or visit our website at **midlandbrick.com.au**



DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.

© Copyright Midland Brick - all rights reserved 2025.

010925